

# Expandable 200 zone control panel



Built with cyber security in its DNA the i-onG3MM is SecureConnect™ Cloud and App enabled

## Decimal expansion system

It provides 25% more zones per expander than traditional 8 zone expanders. Expanders have 10 zones in addition to the 10 zones on the end station. This makes it easy to locate zones and reduces the total number of expanders required. A 30 zone radio expander is also available.

## Performance bus

2 buses with flexibus to provide maximum installation flexibility. Connect expanders and keypads to any bus and address them as though there was only a single bus. Maximum of 50 bus devices.

## Semi-auto addressing

Prevents address duplication for bus mounted devices, saving hours of installation diagnostic time.

## Audible bus device tracing

Locate any bus device quickly and easily. Reduce the time taken to complete maintenance and service calls.

## At a glance...

- SecureConnect enabled
- Range of keypad options
- App for end user control and notification
- Common programming across the range




*Powering Business Worldwide*

# Scantronic product data sheet

## Product specification

|                                   |                                                                        |
|-----------------------------------|------------------------------------------------------------------------|
| Product code                      | i-onG3MM                                                               |
| Compliance                        | EN50131 PD6662:2017 Grade 2 or 3                                       |
| Zones on board                    | 10                                                                     |
| Total zone capacity               | 200                                                                    |
| Total number of buses             | 2 - Flexibus                                                           |
| Number of users                   | 200                                                                    |
| Number of outputs                 | 200 plus 16 communicator                                               |
| Maximum number of partitions      | 20                                                                     |
| Number of part sets per partition | 3                                                                      |
| Power supply                      | 2A                                                                     |
| Battery (maximum capacity)        | 1 * 17Ah                                                               |
| Temperature range                 | Environmental class 2 -10°C to 55°C 93% RH                             |
| Weight                            | 4.5Kg panel without battery                                            |
| Remote communications             | Ethernet included. Choice of plug on communicators for PSTN, GSM or 4G |
| Communications security           | SSL/TLS - when communicating with SecureConnect™ App or Cloud          |
| Dimensions                        | 320mm (h) x 402mm (w) x 102mm (d).                                     |

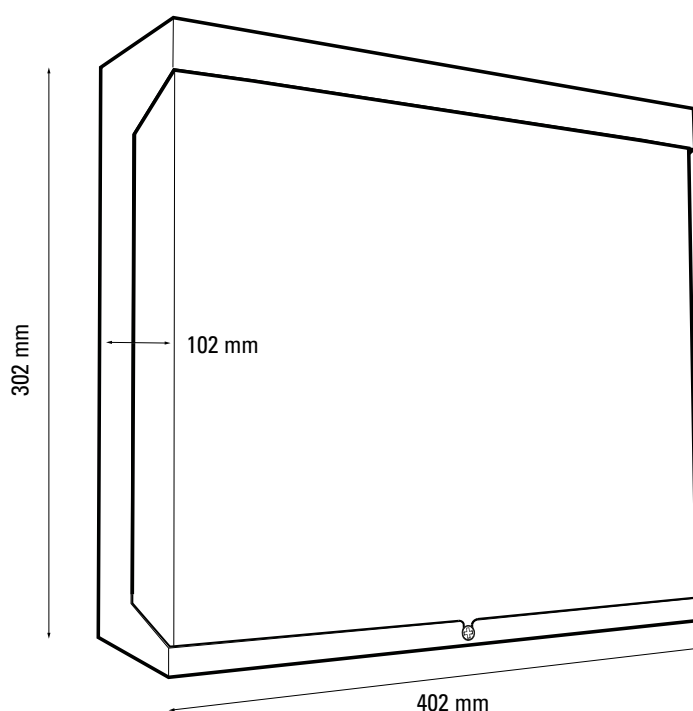

**Compare product compatibility** with our easy to read chart: [www.eaton.com/security-works-with](http://www.eaton.com/security-works-with)

**Eaton**  
Electrical Sector  
EMEA Route de la Longeraie 7  
1110 Morges, Switzerland

**Eaton Electrical Products Ltd**  
Security House,  
Vantage Point Business Village,  
Mitcheldean, Gloucestershire  
GL17 0SX

Tel: +44 (0)1594 545 400  
Email: [securitysales@eaton.com](mailto:securitysales@eaton.com)  
Web: [www.myscantronic.com](http://www.myscantronic.com)

Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.